P 520 501/P 520 701/P 520 801
P 522 501/P 522 701



P 520 501
P 520 701
P 520 801



P 522 501
P 522 701

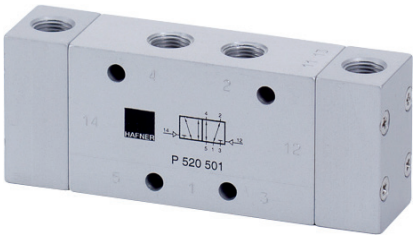

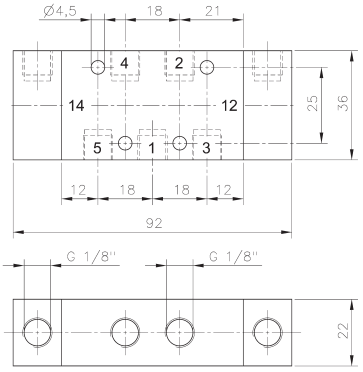

P 520 501/P 522 501

Pneumatically actuated 5/2-way spool valve.

Type P 520 _ _ _ double pilot
Type P 522 _ _ _ double pilot dominating at port 14

If signal is applied to 14 the valve is open
from 1 to 4 and 2 to 3, 5 is closed.
If signal is applied to 12 the valve is open
from 1 to 2 and 4 to 5.

Position is kept until next pneumatic signal is
applied.

Exhaust can be throttled.

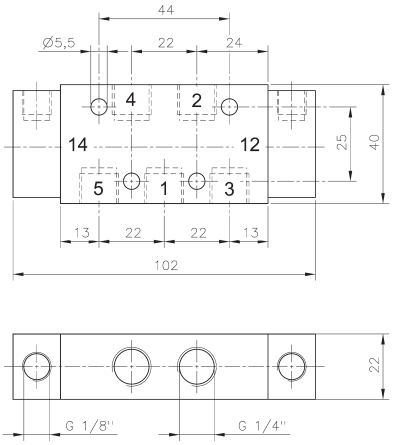

P 520 701/ P 522 701

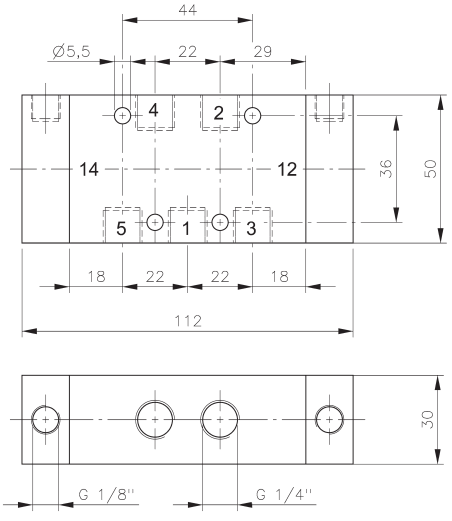

P 520 801

Type	Port size	Air flow	Operating press.	Actuating press.	Weight	
P 520 501	G 1/8“	650 l/min	1 - 10 bar	2,5 - 10 bar	0,20 kg	Ex
P 522 501	G 1/8“	650 l/min	1 - 10 bar	2,5 - 10 bar	0,20 kg	
P 520 701	G 1/4“	1250 l/min	1 - 10 bar	2,5 - 10 bar	0,22 kg	Ex 316
P 522 701	G 1/4“	1250 l/min	1- 10 bar	2,5 - 10 bar	0,22 kg	
P 520 801	G 1/4“	1450 l/min	1 - 10 bar	2,5 - 10 bar	0,44 kg	Ex